



PRODUCT OVERVIEW

The **DECO** series 2-headed emergency unit has been developed to be architecturally appealing, easy to install, and an economical solution to emergency lighting requirements. The injection molded thermoplastic housing is corrosion and flame resistant. The universal mounting plate allows for effortless installation. The **DECO** comes complete with 2 fixed 5.4W heads. Damp location rating is standard.

EXTERNAL SPECIFICATIONS

The **DECO** series is constructed from high quality corrosion and flame resistant thermoplastic. White finish is standard (black color optional). Emergency lighting heads are fixed with prismatic lenses for increased light distribution. Universal mounting bracket is easily snapped onto the **DECO** housing. External test switch and monitor LED are standard.

HOUSING

The **DECO** series utilizes a corrosion and flame resistant injection molded thermoplastic housing and mounting bracket. Lightweight and durable, the **DECO** is ideal for use in areas where materials such as steel and aluminum may deteriorate. The bracket connection allows installation to a standard surface mounted junction box.

INSTALLATION

The **DECO** luminaire is suitable for surface wall or ceiling mounting. Suitable for indoor/damp installation. 120/277VAC.

ORDERING INFORMATION

Series	Model	Options
DECO	6	B (black housing)

DECO BUILDER

Series	Model	Options

EXAMPLE: DECO-6

DESCRIPTION: DECO emergency luminaire, emergency only, 6V 11W, damp location

JOB:	TYPE:
-------------	--------------

BATTERY

The **DECO** series emergency lighting fixture is configured for standard operation 120/277VAC dual voltage input with current limit protection. Current charge regulator is standard. Minimum 90 minutes emergency duration.

LAMPS

The **DECO** series is supplied with two (2) front mounted, fixed 5.4W wedge base incandescent lamps. The polycarbonate prismatic lenses offer durability and high light distribution.

BATTERY & CIRCUIT TECHNOLOGY

The **DECO** series is supplied with a maintenance free, sealed lead calcium battery for emergency operation that provides a minimum emergency duration of 90 minutes. The recharge time of the battery is twenty-four (24) hours. The maximum working temperature is 50°C.


HOUSING

The **DECO** series emergency lighting fixture comes standard rated for damp location installations. The **DECO** is an ideal solution for exterior covered breezeways, warehouses, covered corridors and retail.

UNIVERSAL MOUNTING

The **DECO** emergency lighting unit uses a universal mounting bracket that snaps into the **DECO** housing. Easy field wiring and durability make the **DECO** a favorite among contractors.

DIMENSIONS (in.)

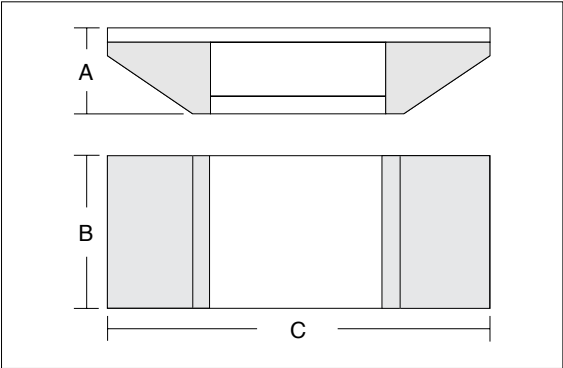

Wattage	A"	B"	C"
2x5.4W"	2 1/4"	5 1/8"	11 7/8"

WARRANTY

The **DECO** Series comes with a 5-year factory warranty. Lamps are not covered under the warranty. Deliberate damage, misuse, improper installation effectively cancel the warranty.